

Disposable Bacteria Filters

- Prevents contamination and fluid from entering the vacuum regulator and vacuum systems
- PVDF special filter material, can effectively filter the virus and bacteria
- Effective filtration area: 32 cm²
- Maximum operating temperature: 140 °F (60 °C)
- Maximum operating pressure: -14.5 ~ 14.5 psi
- Filters down to 0.22 micron




F11-HB



F11-NT2/HB



Dimensions

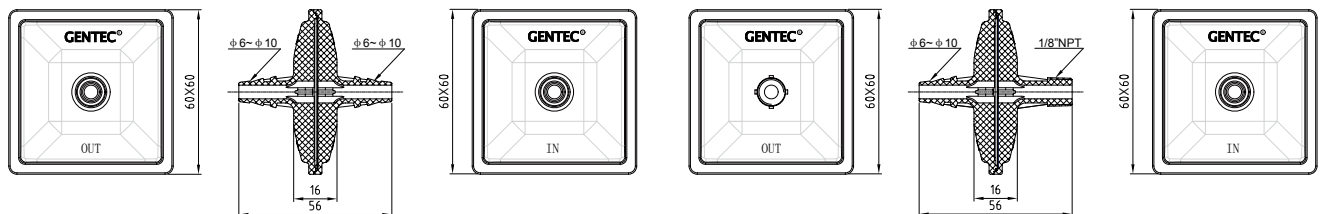

F11-HB

F11-NT2/HB

Ordering Information

Model	Description
F11-NT2/HB-0.45	Hydrophobic, Inlet: 1/4" Hose Barb, Outlet: 1/8" NPT, Filter Accuracy: 0.45µm
F11-NT2/HB-0.22	Hydrophobic, Inlet: 1/4" Hose Barb, Outlet: 1/8" NPT, Filter Accuracy: 0.22µm
F11-HB-0.45	Hydrophobic, Inlet and Outlet: 1/4" Hose Barb, Filter Accuracy: 0.45µm
F11-HB-0.22	Hydrophobic, Inlet and Outlet: 1/4" Hose Barb, Filter Accuracy: 0.22µm