


153 Series Single Stage Regulators

Designed for heavy duty gas welding, cutting, and heating applications. These regulators are ideal to use for steel fabrication, ship building, metallurgical and chemical industries.

- 2-1/2" gauges for easy reading
- 3-1/4" stainless steel diaphragm for accurate pressure delivery
- Delrin cap bushing for smooth adjustments
- Stem-type seat assembly for more reliable performance
- Forged brass body and housing cap
- Self re-seating external pressure relief valve on oxygen, inert gas, air, CO₂, and hydrogen models
- Sintered bronze inlet filter
- Steel Gauge Protectors are color-coded: green for Oxygen (GP31X) and red for Acetylene (GP31Y) Models
- Weight: 4 lbs 13 oz
- UL listed

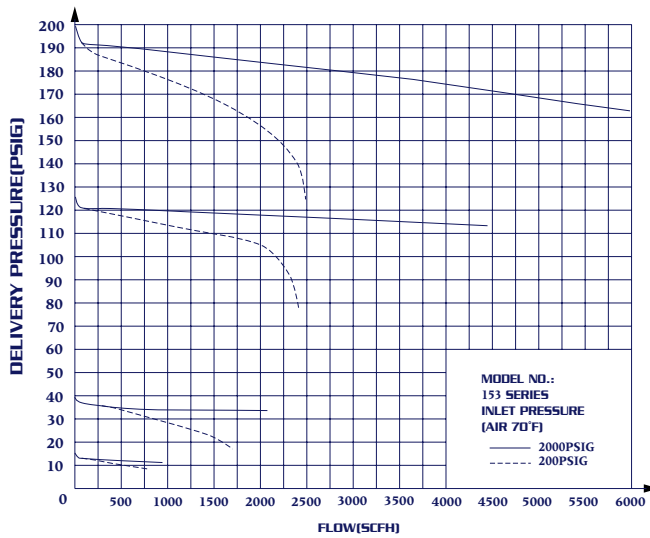

Gauge Guard Models



153X-125G



153Y-15G
153Y-15-3G

Model Number	Gas Service	Maximum Inlet Pressure (PSI)	Maximum Delivery Pressure (PSI)	Inlet Gauge	Outlet Gauge	Inlet Connection	Outlet Connection
153F-125	L.P. GAS	400	5-125	2-1/2", 400PSI	2-1/2", 200PSI	CGA510	9/16" - 18LH(M)
153X-125	OXYGEN	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA540	9/16" - 18RH(M)
153X-250			10-250		2-1/2", 400PSI		
153Y-15	ACETYLENE	400	2-15	2-1/2", 400PSI	2-1/2", 30PSI, RL	CGA510 CGA300	9/16" - 18LH(M)
153Y-15-3							
153IN-125	INERT GAS (Ar, He, N ₂)	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA580	5/8" - 18RH(F)
153IN-250			10-250		2-1/2", 400PSI		5/8" - 18RH(F)
153IN-250-F			10-250		2-1/2", 400PSI		1/4" SAE FLARE
153Q-125	AIR	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA590	5/8" - 18RH(F)
153Q-200			10-200		2-1/2", 400PSI		9/16" - 18RH(M)
153C-125	CARBON DIOXIDE	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA320	5/8" - 18RH(F)
153C-200			10-200		2-1/2", 400PSI		
153H-125	HYDROGEN METHANE	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA350	9/16" - 18LH(M)
153H-200			10-200		2-1/2", 400PSI		

1 psi = 0.00689 MPa = 6.895 kPa = 0.06895 bar = 0.07 kgf / cm², 1 scfh = 0.0283 m³/h = 0.472 LPM