

155 SERIES

Extra Heavy Duty Single Stage Regulators

Industrial Gas Apparatus


155 Series Single Stage Regulators

These extra heavy duty models are designed for heavy duty cutting, industrial applications, laboratory testing, manifold installations, etc.

- Single-stage construction
- Forged brass body and housing cap
- Delrin cap bushing for smooth adjustments
- Self re-seating external pressure relief valve on oxygen, inert gas, air, and hydrogen models
- Sintered bronze inlet filter
- 2-1/2" gauges for easy reading
- 3-1/4" diaphragm
- Weight: 7 lbs 10 oz
- Conforms to CGA E-4 standard for gas pressure regulators



155

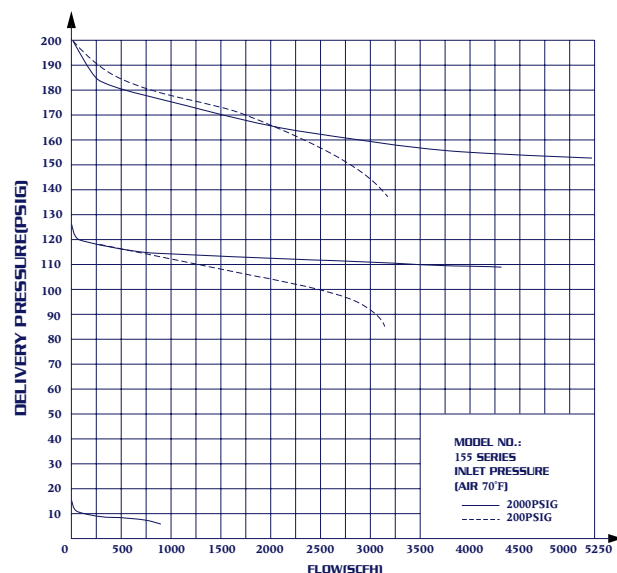

Model Number	Gas Service	Maximum Inlet Pressure (PSI)	Maximum Delivery Pressure (PSI)	Inlet Gauge	Outlet Gauge	Inlet Connection	Outlet Connection
155F-125	L.P. GAS	400	5-125	2-1/2", 400PSI	2-1/2", 200PSI	CGA510	7/8" - 14LH(M)
155X-125	OXYGEN	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA540	7/8" - 14RH(M)
155X-200			10-200		2-1/2", 400PSI		
155Y-15	ACETYLENE	400	2-15	2-1/2", 400PSI	2-1/2", 30PSI, RL	CGA510	7/8" - 14LH(M)
155Y-15-3					CGA300		
155IN-125	INERT GAS (Ar, He, N ₂)	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA580	7/8" - 14RH(M)
155IN-200			10-200		2-1/2", 400PSI		
155Q-125	AIR	3000	5-125	2-1/2", 4000PSI	2-1/2", 200PSI	CGA346	7/8" - 14RH(M)
155Q-200			10-200		2-1/2", 400PSI		
155H-200	HYDROGEN METHANE	3000	10-200	2-1/2", 4000PSI	2-1/2", 400PSI	CGA350	7/8" - 14LH(M)

1 psi = 0.00689 MPa = 6.895 kPa = 0.06895 bar = 0.07 kgf / cm², 1 scfh = 0.0283 m³/h = 0.472 LPM